





New steel universal sill clamps with free height adjustment, for any type of vehicle with under-floor sill crests.

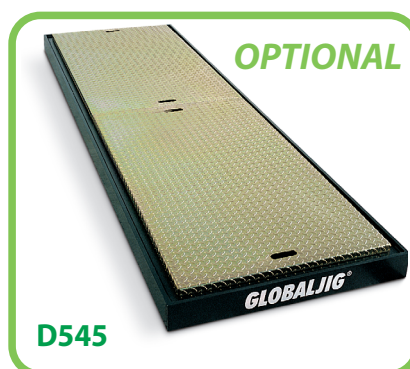

D545

The covering plate allows flush fitting of the Koala frame to make the positioning of the vehicle even faster

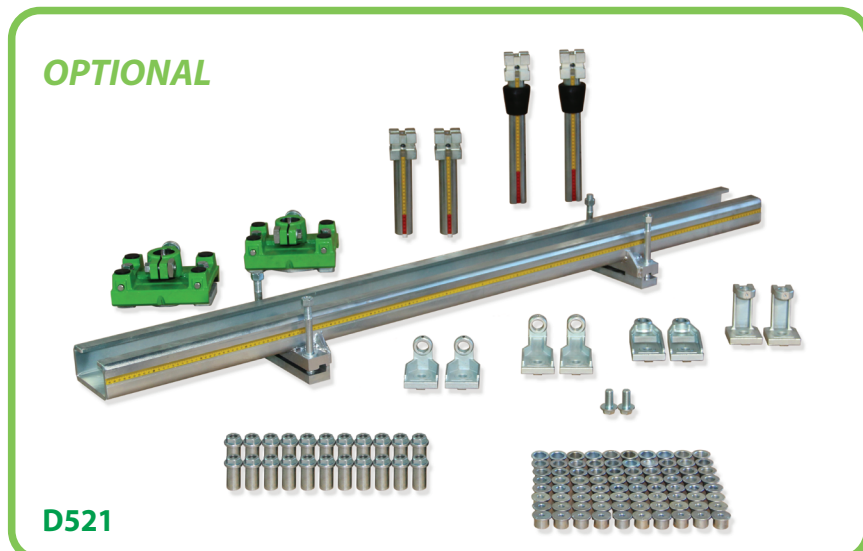

D521

New GLOBALJIG accessory kit, very useful for fixing and sealing the parts of the vehicle to be welded or replaced, or to make comparison measurements with the non-affected part of the vehicle.



E123

OPTIONAL

McPherson for the control of the shock absorbers and the external sheet metal parts.

# GLOBALJIG®




**KOALA**  
**GLOBALJIG®**

**Bellini Systems S.r.l.**  
Innovative Automotive Solutions  
Via Simonucci,1 - 06135 - Perugia Italy  
Tel.: +39 0585.8364 - Fax +39 0585.833880  
info@globaljig.com - www.bellinisystems.it

The perfect choice for  
"fast repair"

#### TECHNICAL CHARACTERISTICS

LENGTH	3000 mm
WIDTH	930 mm
MINIMUM HEIGHT	135 mm
MAXIMUM HEIGHT	1650 mm
LIFTING CAPACITY	2500 kg
WEIGHT	1425 kg



**KOALA**



# KOALA

## THE PERFECT CHOICE FOR "FAST REPAIR"

Koala is a small straightening bench with great versatility and potential. Suitable for all situations of "Fast Repair", currently so important.

In fact, in addition to the standard equipment which includes 4 anchoring clamps, pulling tower and 4 wheel stands, the Koala can accommodate a number of accessories from the GLOBALJIG Universal System. For example, the McPherson measuring bridge (E121) for the control of the McPherson shock absorbers can easily be mounted and used, as well as anchorages for Mercedes vehicles (D223/7). Koala will accommodate various measuring systems, electronic or mechanical, produced by Globaljig International or other manufacturers. These can easily be utilised thanks to the variable height between the Koala bench and the underbody of the vehicle to be repaired, without compromising the pulling capability.

The Koala can also be supplied as a flush fitted version, with a cover to be able to utilise the available space in the workshop when the bench is not in use. The Koala can be used for all aspects of body repair including: Diagnosis for evaluation and estimating, stripping and re-assembly of vehicles, as a lift for re-finishing and touch-up, and as a wheel-free lift for use with wheel-alignment systems.

"MINIMUM OVERALL DIMENSIONS AND GREAT PULLING POWER"



**QUALITY:** use of the best materials and manufacturing processes which meet the highest industry standards place GLOBALJIG products ahead of the field.

**GLOBALJIG**®

### CLAMPS



Sill clamp with extension plate for increased space between the vehicle and bench, ideal for use of measuring systems

### ATTACHMENT OF PULLER



The mounting of the articulated puller is quick, simple and can be attached anywhere around the frame of the Koala

### MAXIMUM HEIGHT



Surpasses other lifts in height: the Koala lifts to 1650 mm

### STANDARD COMPOSITION



01

**POSITIONING**  
of the vehicle without need for ramps.



02

**MOUNTING**  
of the crossmembers and lifting pads.



03

**RESTING**  
of the vehicle's wheels on the wheel stands, equipped with casters, and mounting of the universal sill clamps.



04

**TIGHTENING.**  
of the universal sill clamps and lifting of the vehicle.

