

### Scissor Lift

twin lifting rams and high grade steel, the Quick Pull has a lifting capacity of 2500 Kg . The double mechanical safety latches together with laser cut holes in the base plate help interject the safety latches for added protection




**The lift operation** can be safely controlled with control pad which houses all the safety features and has an 8metre lead which relays low voltage commands back to the electro-hydraulic control unit. This allows close proximity while safely operating the lift during the loading and unloading procedure.

Assembly and commission is quick and simple with the lift being secured to the surface with expansion bolts, all aspects of installation maintenance and use are documented in the manual along with the **CE certification**.



**Quick Pull**

**GLOBALJIG®**

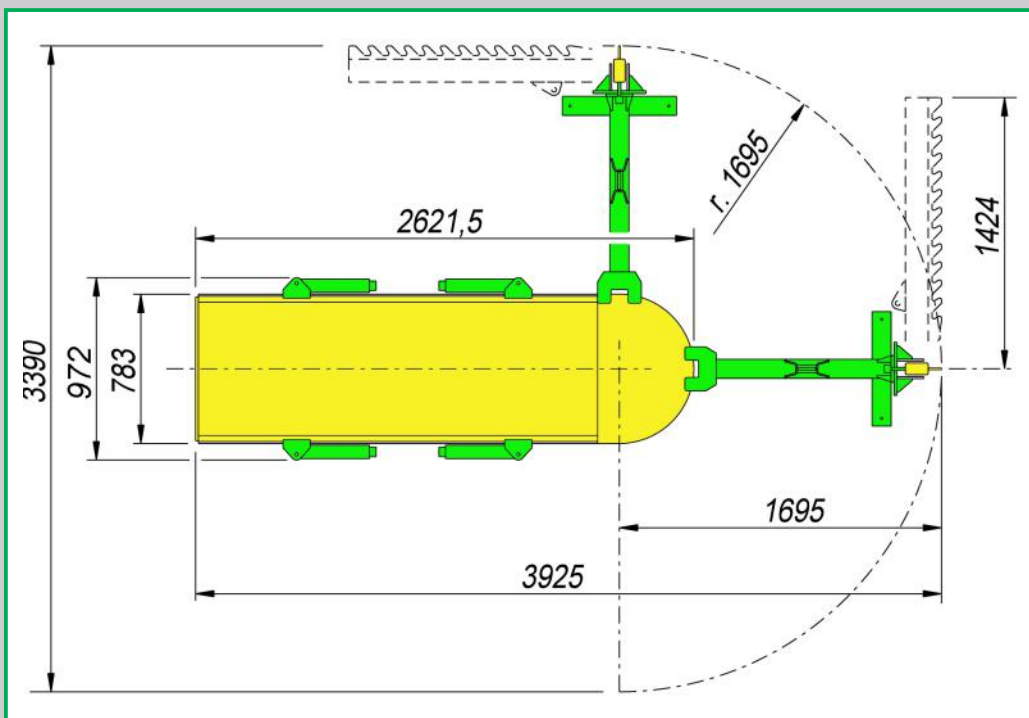

### Technical data

Total weight ..... 865 Kg  
( Lift + Platform 590 Kg)

Hydraulic pressure ..... 350 bar

Max vehicle weight ..... 2.500 kg

### Power supply:

Three-phase ... 230/400V 50/60 Hz  
Single-phase ....110/220V 50/60 Hz

**GLOBALJIG®**  
brand in use

**BELLINI SYSTEMS S.R.L.**  
Via B. Simonucci, 1 06135  
Ponte San Giovanni - Perugia (PG) ITALY  
Tel. +39 0585 8364 +39 075 597291  
www.bellinisystems.it info@bellinisystems.it

**MINIMUM INVESTMENT  
FOR MAXIMUM EFFICIENCY**







**Adjustable Arms;** easily removable pads feature adjustable height to lift even the lowest of vehicles, these can rotate to adapt to any length of vehicle without the need to be locked into place on the bench frame. This allows easy positioning on the underside of the vehicle and enables the bench to be used as a lift, in order to do most of the common body shop tasks such as sanding, assembly and disassembly of panels and parts, and other cosmetic operations.

**Clamps;** adjustable height rocker brackets which run on strong guides can be secured easily and quickly with either an air gun or simply with a wrench.

The insertion of the clamps is facilitated by the very low profile that enables the tightening of the bolts to lock and secure the car on the pinch welds once the vehicle has been raised in the air on the lifting pads, allowing the operator to work at an ergonomic height



All the components of the Quick Pull have been included on the basis of our experience and the current needs of the modern body shops. With no need for access ramps or side platforms, thanks to the fact that the minimum height of the Quick Pull is an astonishing 10 centimeters, makes it possible to perform 80% of small and medium repairs, keeping mechanical parts in place. This enables many everyday body shop related tasks to be carried out without the need to move vehicles around the body shop, saving time and money.

#### Quick Pull's Components:

- 4 adjustable height sill clamps
- 4 adjustable articulating arms with height adjustable rubber pads
- 4 Stackable rubber pads with supports spacers
- 1 Adjustable pulling tower with multiple directional pulls
- 1 Hydraulic set with pump, chain, hook, clamp and safety cable
- 1 Electro-hydraulic control unit with control panel



*Technique and future innovation*

*Suitable for new concepts of repair*



**Mobile Pulling Tower** is adjustable both horizontally and vertically up to 180 degrees, to cover any direction with a maximum pulling power of 5 tons. The mobility of the pulling tower makes positioning and mounting of the arm to the bench extremely simple, which allows multiple pulling angles for the pulling tower with a strong locking and maximum safety.



**Metal Spacers** with Rubber Pads supplement those provided on the adjustable crossbars to reach taller vehicles in order to lift the vehicle either from rocker panels, chassis frames or mechanical cross members of higher vehicles and SUVs.



**The bench profile** is extremely low, at only 10 cm high it can easily accommodate a variety of vehicles without the requirement of ramps or side platforms.

